


T04 (92.09.15) G01D 15/18

At each sync. pulse from the sync. pulse generator (22) the control memories (18,19) are sampled serially, and the codes of the pulse lengths for recording points on the carrier by the ink-jet heads are written into two registers (20,21).

Bul.34/15.9.92 (5pp Dwg.No.2/3)

**S02-K06B**

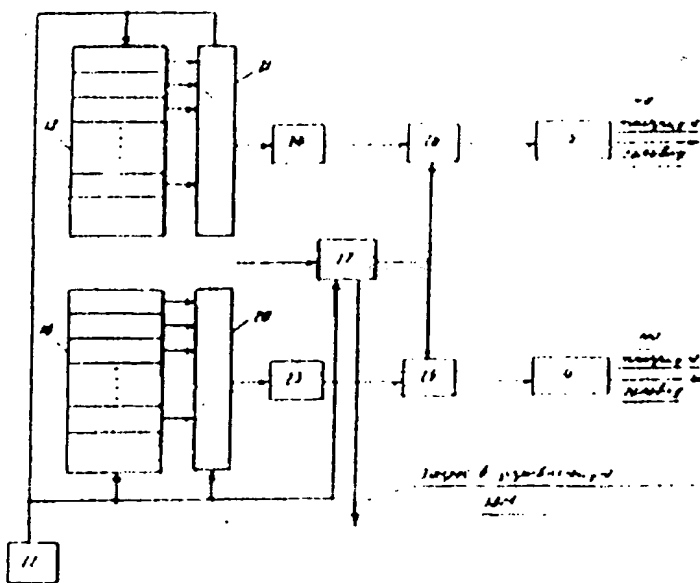

Unauthorised copying of this abstract not permitted



# DERWENT

### Scientific and Patent Information